



**POLYKEN® 221**  
**Premium Grade, Solvent**  
**Resistant Duct Tape**


**APPLICATIONS**

- Screen blocking of frames in the screenprint industry.
- Waterproof packaging.
- Can and barrel sealing.
- Sealing white, pre-formed duct joints.
- Sealing tape for sidewall building materials.
- Sealing sheet metal duct connections.
- Seaming insulation materials.

**FEATURES & BENEFITS**

- Solvent resistant natural rubber adhesive.
- Highly conformable.
- Aggressive adhesive provides clean removal from frames.

**CONSTRUCTION**

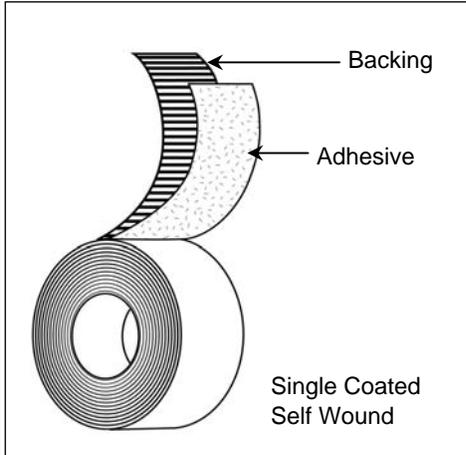

**PRODUCT DESCRIPTION**

**Single-Coated Construction**

**Backing:**

- Polyethylene Coated Cloth

**Adhesive:**

- Rubber

**Colors:**

- White

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	304.80 μ	ASTM D 1000
Adhesion to Steel	75 oz./in.	8.21 N/cm	PSTC-1
Adhesion to Backing	30 oz./in.	3.28 N/cm	PSTC-1
Tensile Strength	33 lb./in.	57.79 N/cm	ASTM D 1000
Tack (Rolling Ball)	2"		
Maximum Performance Temperature	200 F		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical person To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.